

simalube multipoint - the automatic multipoint lubrication system for small quantities of lubricant



5 x 8 ml lubricant

With the simalube multipoint lubrication system 5 individual lubrication points can reliably be serviced. The lubricant quantity per chamber is 8 ml which can be dispensed within a period from 1 to 12 months. By means of an intelligent snapping system, the empty lubricator can be removed from the fitting connection and easily be replaced by a new lubricator. The simalube multipoint dispensers are available filled with various lubricants (grease and oil) and the operating time can be adjusted at any time and be changed according to the requirements.

simalube multipoint

- 5 x 8 ml lubricant (grease or oil)
- Appropriate for the lubrication of linear slides
- Runtime from 1 to 12 months continuously adjustable
- snapping system allows easy mounting to fitting connection
- short initial periods
- Fast coupling to tubes with \varnothing 4/2.7 mm




Swiss made / worldwide patents



The simalube multipoint, driven by the worldwide patented gas generating drycell, lubricates automatically and reliably 5 lubrication points to the required quantity. It operates automatically 24 hours a day, 7 days a week, and it is adjustable from 1 to 12 months.

The practical benefits of the compact simalube multipoint lubricator:

- 5 lubrication points can simultaneously be supplied
- Reliability - allowing fit and forget procedures until predetermined replacement time
- Continuously setting time from 1 to 12 months
- Easy adjustment of dispensing rate during operation
- Content: 5 x 8 ml lubricant (grease or oil)
- Transparent container to check lubricant levels (quantity control)
- Ideal relation between size and content of lubricant. Compact size permits installation in restricted areas
- Hermetic sealing prevents ingress of dirt or foreign substances
- Environmentally friendly. Easy to dispose
- Wide range of accessories are available such as adapters nipples, tubes and brushes

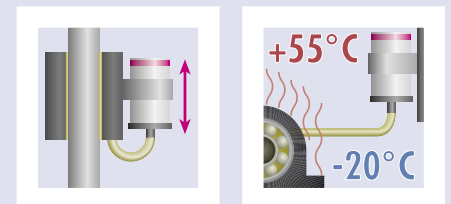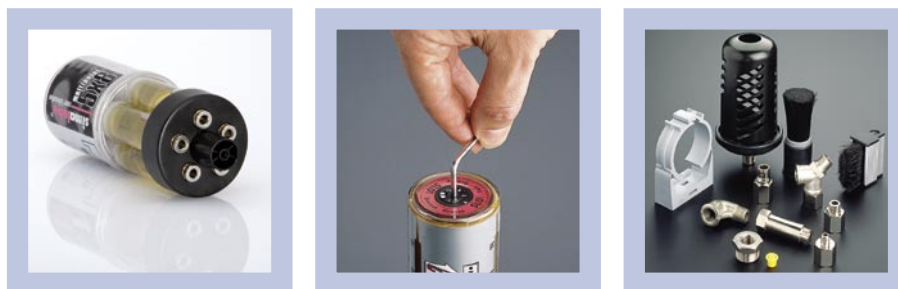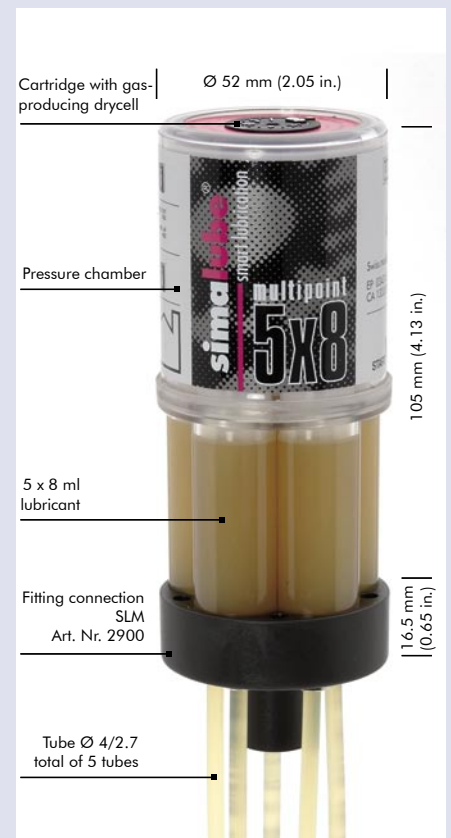

simalube multipoint standard lubricants

| No. | Application | Temp. range (in the area of lubrication) | Base oil | Thickener | Oil viscosity at 40°C |
|--------------|----------------------|--|-----------|-----------|------------------------|
| SLM01 | Multipurpose grease | - 30 / + 120°C | mineral | Li/Ca | 118 mm ² /s |
| SLM06 | Fluid grease | - 40 / + 110°C | mineral | Li/Ca | 98 mm ² /s |
| SLM10 | Food industry grease | - 30 / + 140°C | synthetic | Al | 118 mm ² /s |
| SLM14 | Chain oil | - 10 / + 90°C | mineral | - | 68 mm ² /s |

Accessorie parts to simalube multipoint

| screw connection for tube ø 4 mm | | | | | tube Diameter ø 4 / 2.7 mm | | Fitting connection SLM Adapter for simalube multipoint | |
|--|-------|-------|------|------|--------------------------------------|-----------|--|-----------|
| d | R 1/8 | R 1/4 | M5 | M6 | l | per meter | d | 5 x ø 4mm |
| Nr. | 1170 | 1171 | 1172 | 1173 | Nr. | 2100/...m | Nr. | 2900 |